


Simply select the required **MODULES** to create the dust collector taylored to your exact needs.

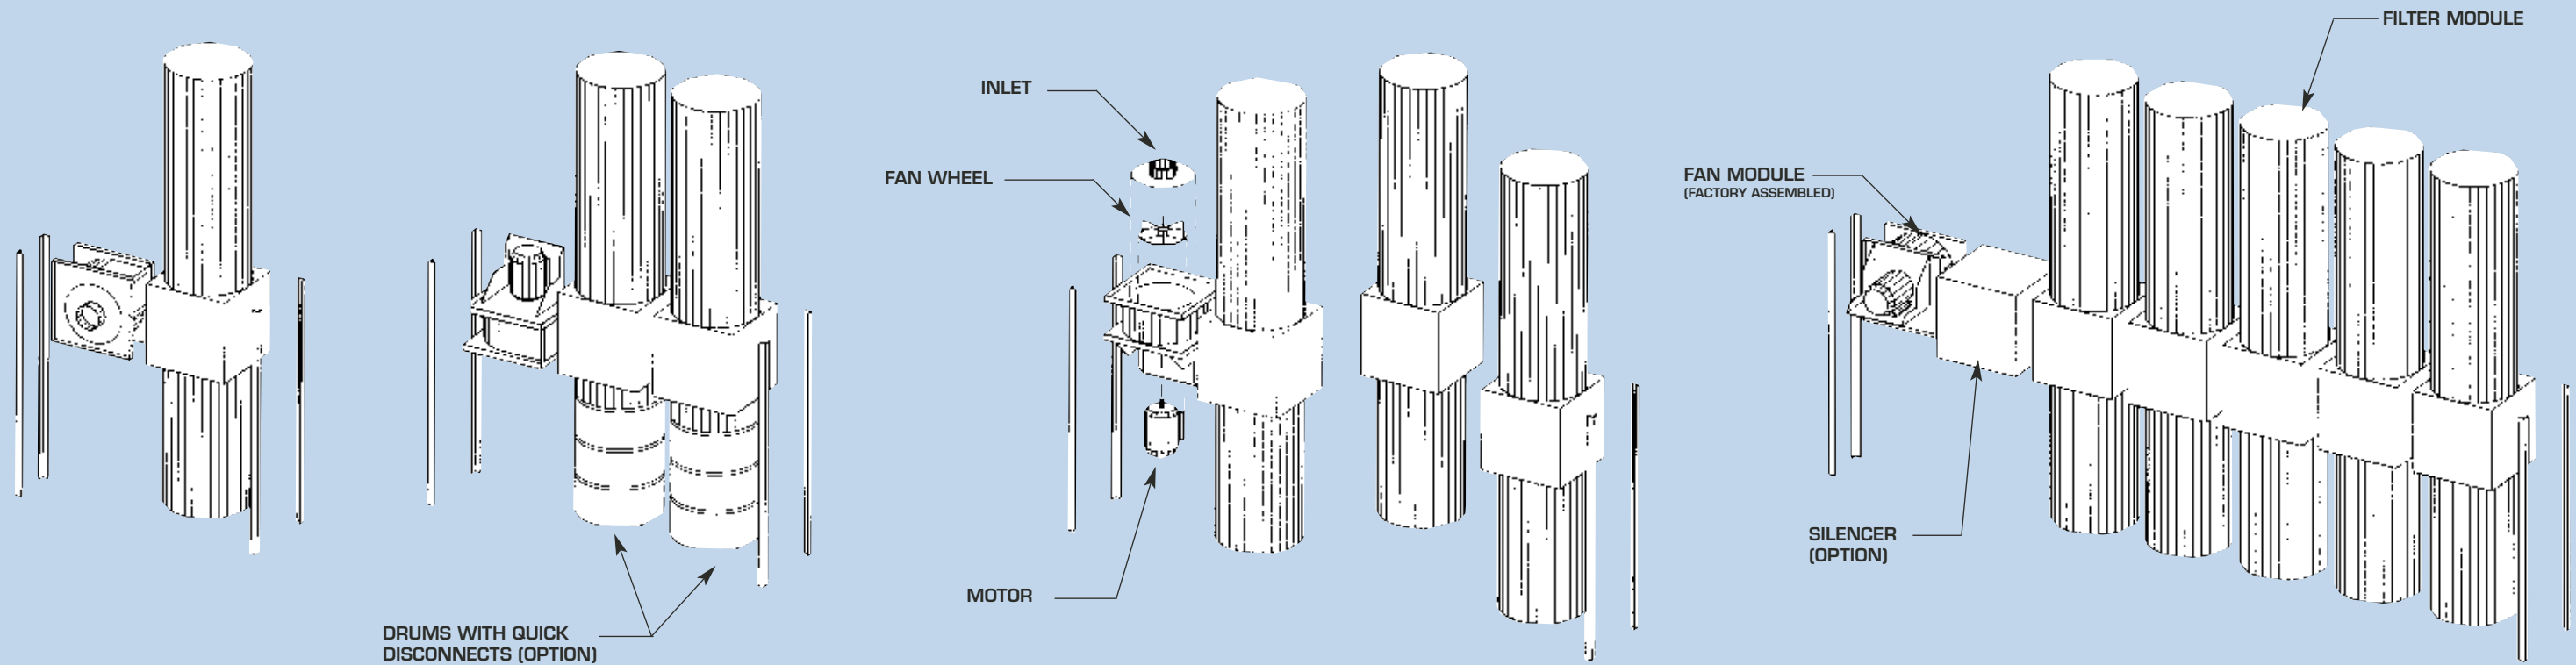

Flexible

The new modular concept engineered by BELFAB allows the LW user to combine the number of filter modules desired to the selected fan module. Inlet location can be top, bottom, left or right.

All these different combinations make the BELFAB LW modular dust collector, the solution to your dust problems.

Expandable

The universal LW fan module can be upgraded from 2 to 20 HP simply by changing motor, fan wheel and inlet. Filter modules can be added to increase filter surface area.

NFPA 664 2002

NFPA 664 2002 standard permits open bag dust collector system with a maximum of 5,000 CFM, in woodworking applications where no mechanically fed sanders are present. Consult NFPA standard for details.